
SOLENOID VALVE VP542-5DZ1-03A

URL:https://www.sxplc.com/solenoid-valve-vp542-5dz1-03a

Product data sheet

Series 5 VP500
Pilot Specifications - Internal Pilot
Pressure specification - standard type (0.7MPa)
Coil specifications - standard
Rated voltage 5 DC 24V
Lead out method D DIN socket type
LED and overvoltage protection circuit with Z-band indicator light · overvoltage protection circuit
Manual operation - non locking push type
Connection diameter 03 3/8

1/3

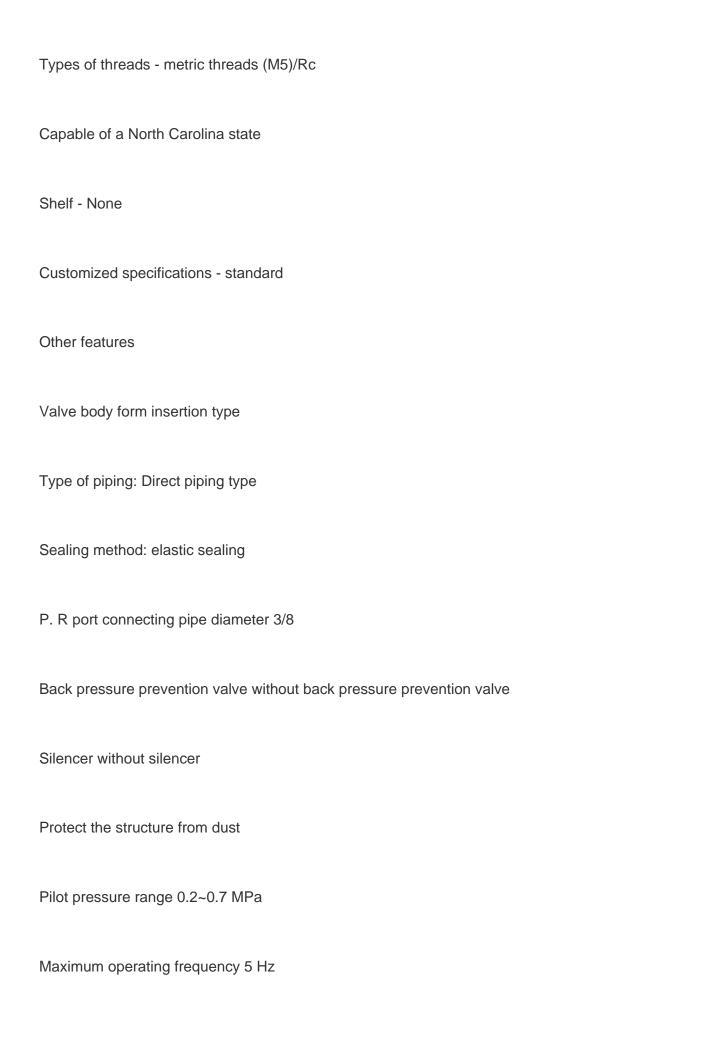

2/3

Response time of 39 milliseconds

Environmental temperature and fluid temperature used -10~50 ° C

CE corresponds to none

Each exhaust method has its own exhaust type

Oil supply without oil supply type

C-value (P? A/B) Direct piping type 8.9 dm ³/(second · bar)

B value (P? A/B) Direct piping type 0.16

Cv value (P? A/B) direct piping type 2.2

C-value (A/B? E) Direct piping type 8.9 dm ³/(second · bar)

B value (A/B? E) Direct piping type 0.2

Cv value (A/B?E) direct piping type 2.1



3/3