



## Transmitter Power Supply, KFD2-STC4-1

URL: <https://www.sxplc.com/transmitter-power-supply-kfd2-stc4-1>

### Product data sheet

#### Features

- 1-channel signal conditioner
- 24 V DC supply (Power Rail)
- Input 2-wire and 3-wire SMART transmitters and 2-wire SMART current sources
- Output 0/4 mA ... 20 mA
- Terminal blocks with test sockets
- Up to SIL 2 acc. to IEC 61508

#### Function

This signal conditioner provides the isolation for non-intrinsically safe applications.

The device supplies 2-wire and 3-wire SMART transmitters, and can also be used with 2-wire SMART current sources. It transfers the analog input signal as an isolated current value.

Digital signals may be superimposed on the input signal and are transferred bi-directionally.

If the HART communication resistance in the loop is too low, the internal resistance of 250  $\Omega$  between terminals 8 and 9 can be used.

Test sockets for the connection of HART communicators are integrated into the terminals of the device.


#### Application

The device supports the following SMART protocols:

- HART
- BRAIN
- Foxboro

#### Assembly

Front view

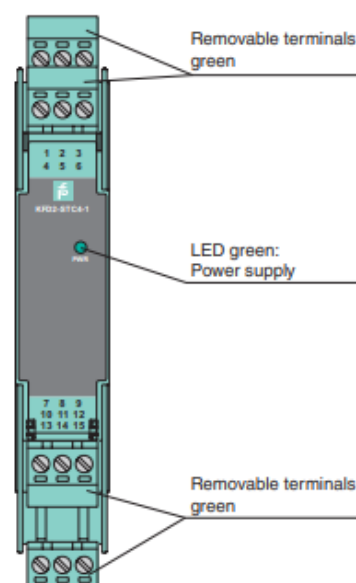

CE

**SIL 2**

