




## Soft starter PSTX210-600-70

URL:https://www.sxplc.com/soft-starter-pstx210-600-70


## **Product data sheet**

1/20

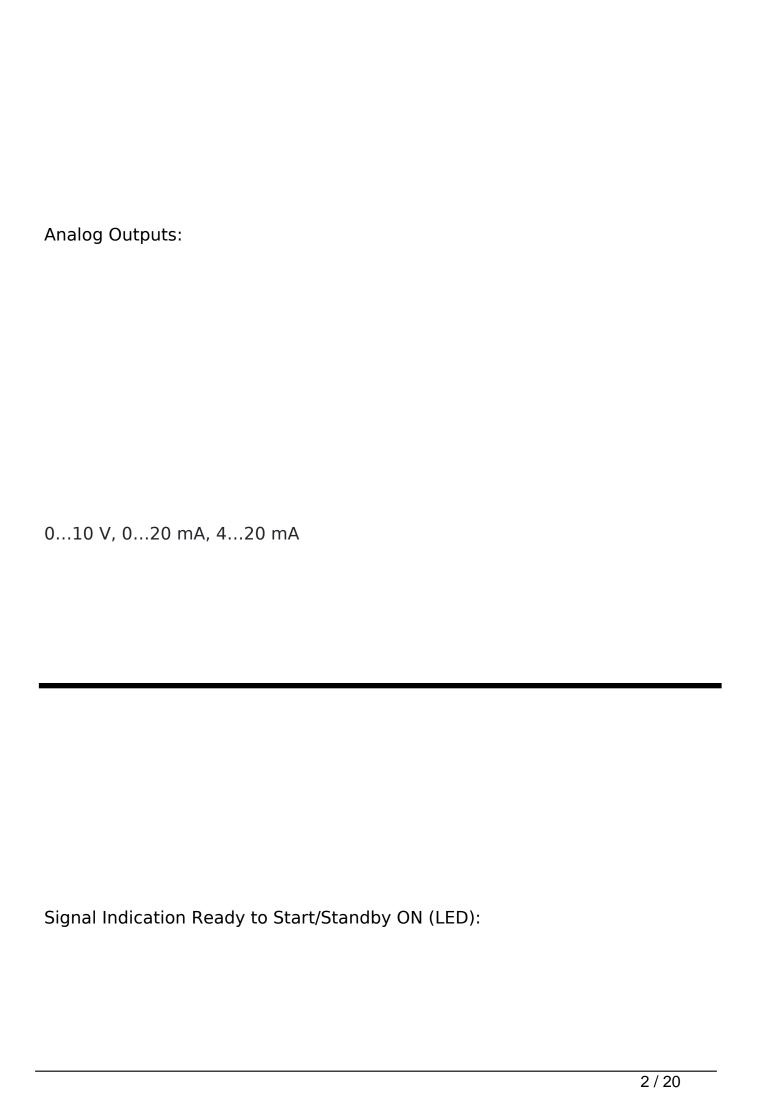



Green	
Signal Indication Running R (LED):	
Green	


Signal Indication Protection (LED):		
Yellow		
Signal Indication Fault (LED):		

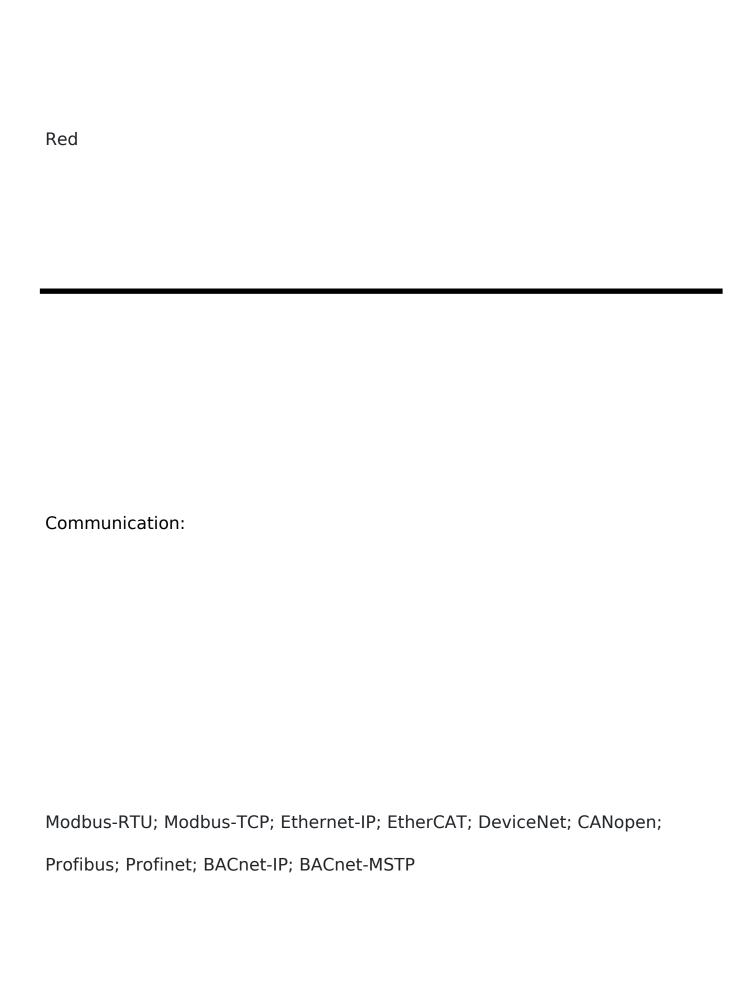


Degree of Protection:		
IP00		
Terminal Type:		

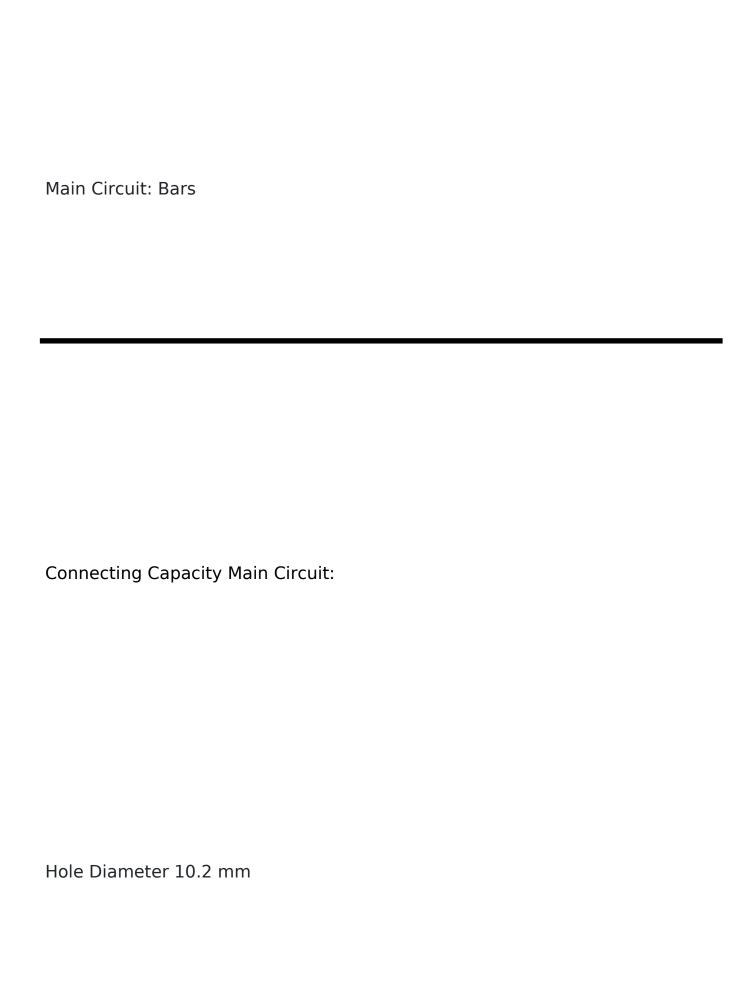


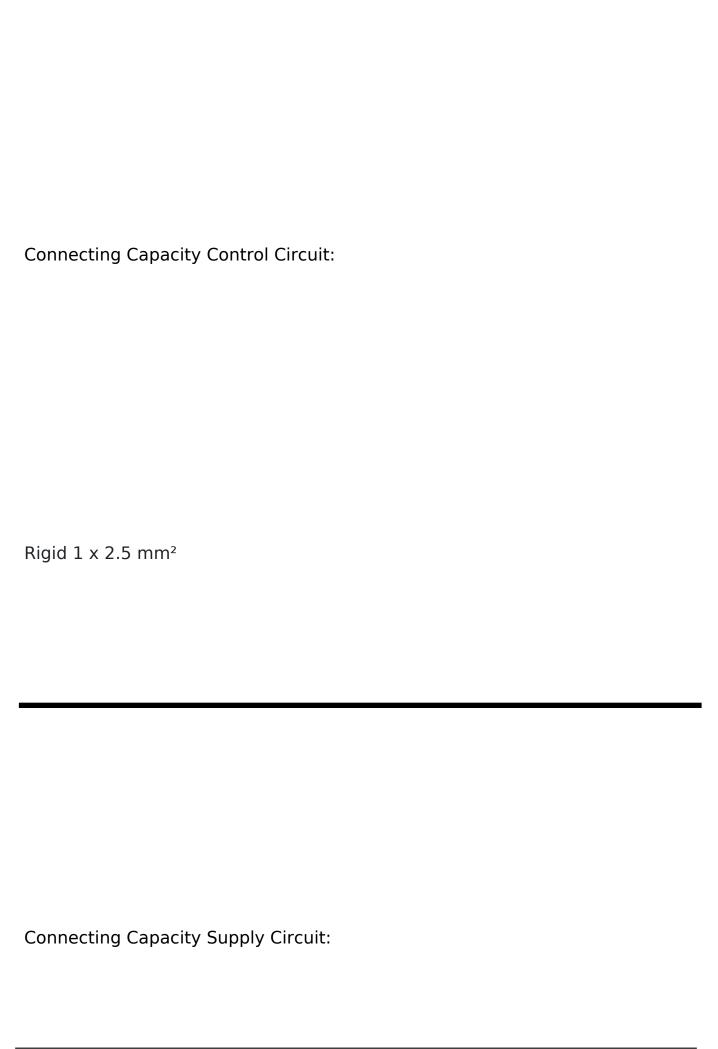






Rated Operational Voltage:
208 600 V AC
Rated Control Supply Voltage (Us):

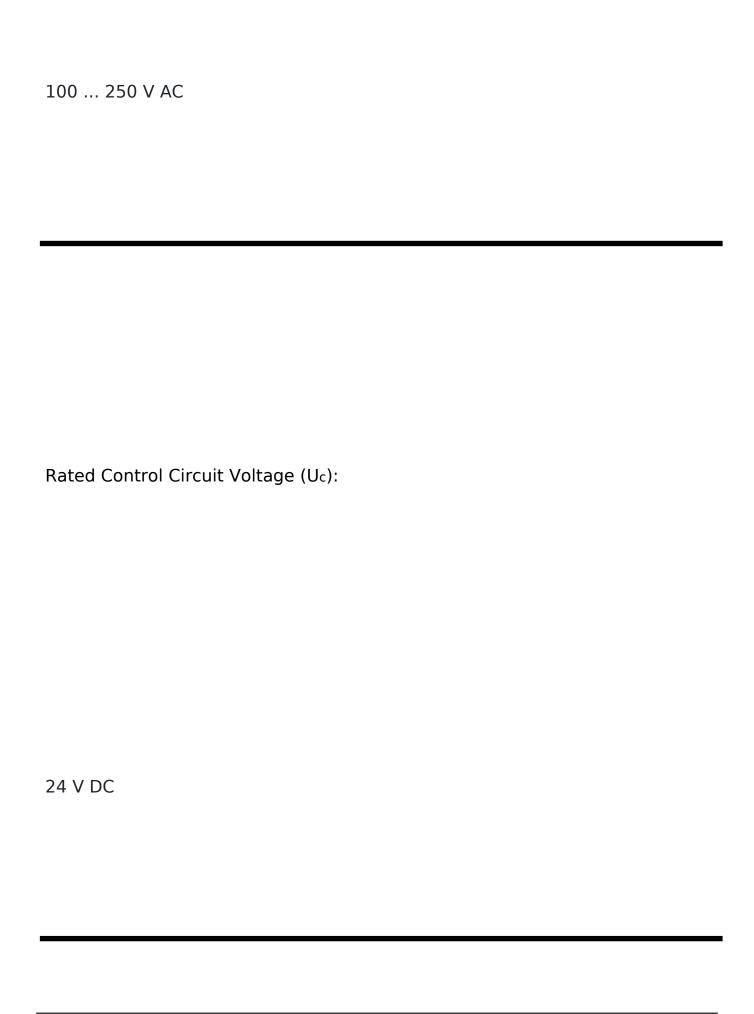


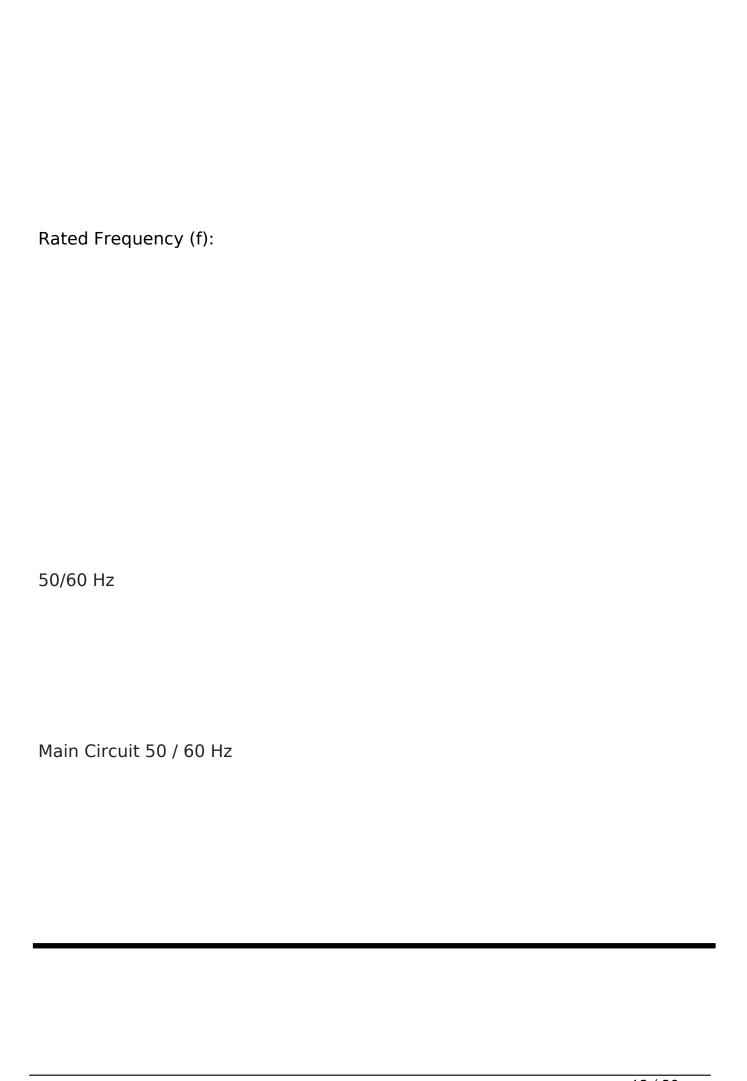

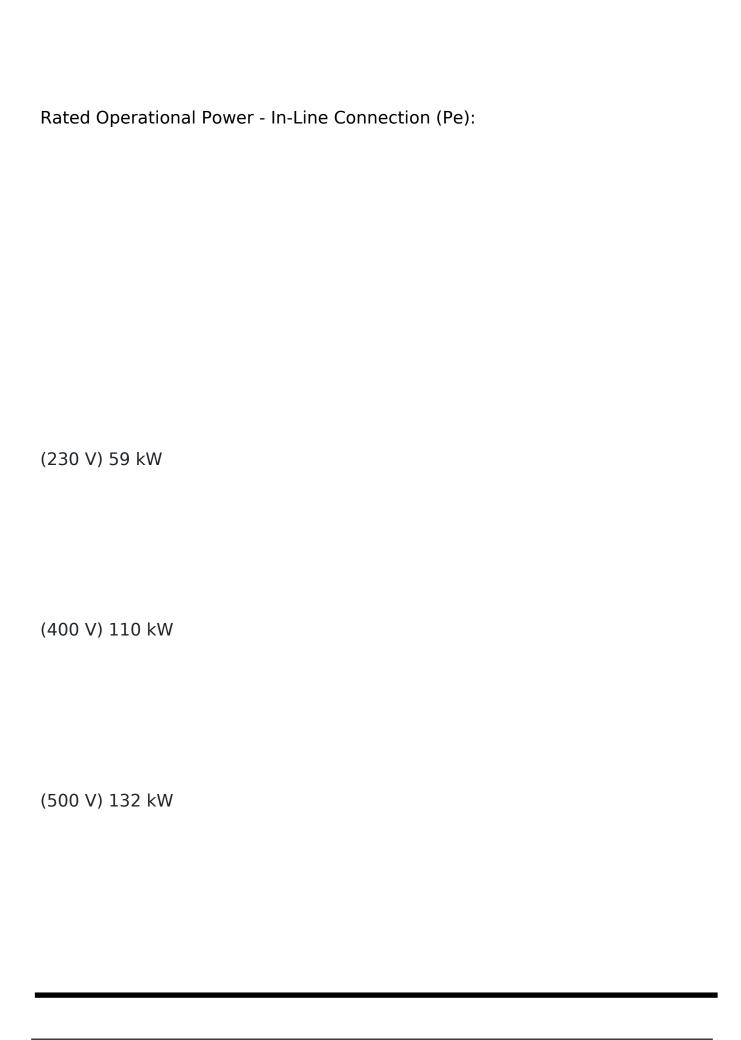


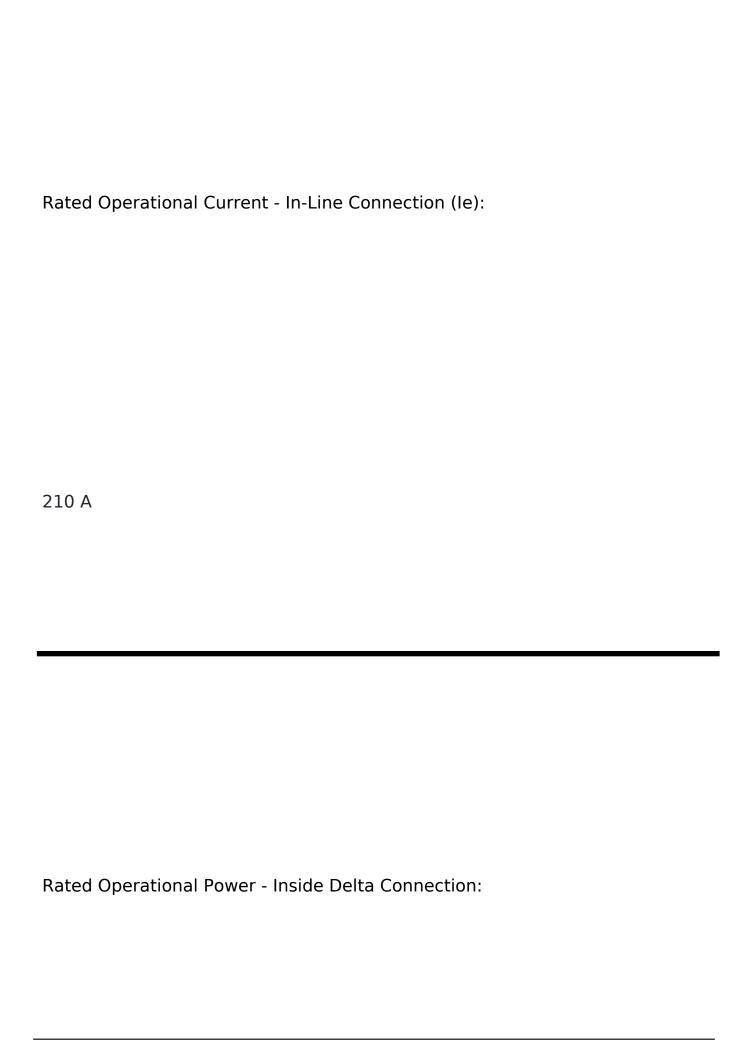

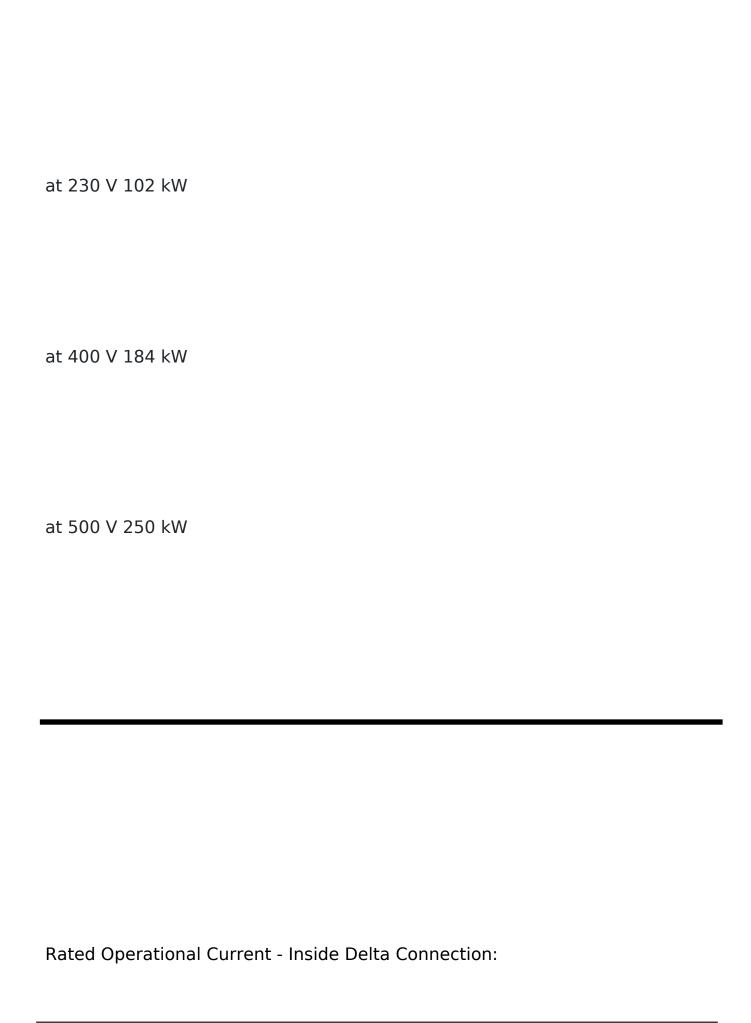

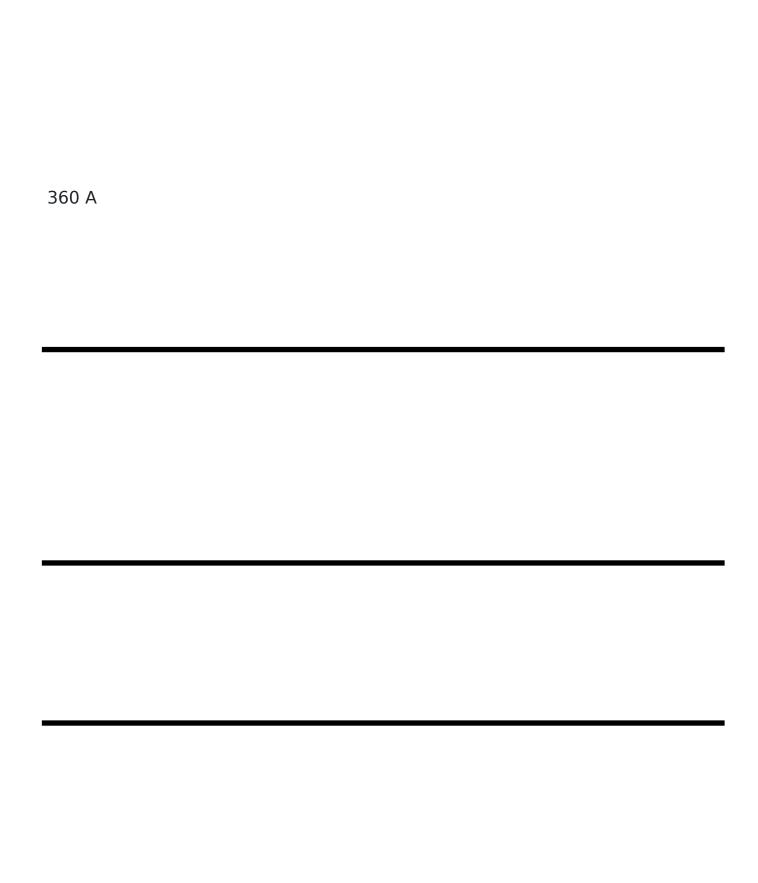

Product Net Width:		
258 mm		
Product Net Height:		

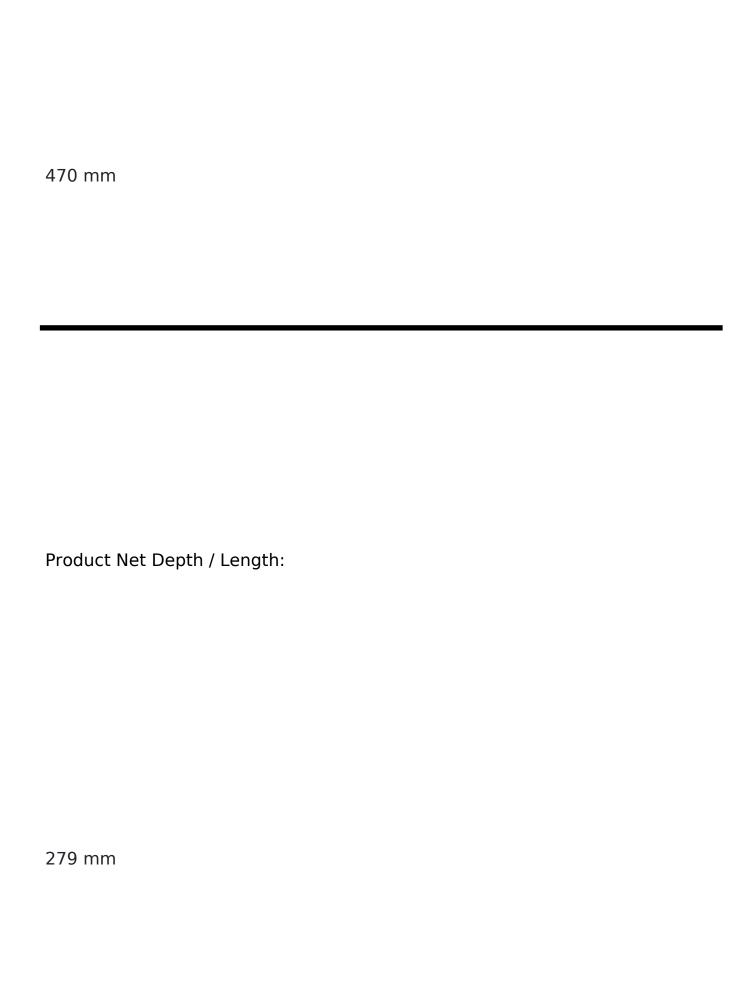

Product Net Weight:			
13.3 kg			

