




Breaker A9F18116

URL:https://www.sxplc.com/breaker-a9f18116

Product data sheet

Grid frequency
50/60 Hz
Rated operating voltage [Ue]
230 V AC 50/60 Hz
Magnetic release limit
510 x ln
Current limiting class
3
Rated insulation voltage [Ui]

Rated withstand voltage [Uimp]
6 kV
Contact position indication
yes
Control type
Handle
Local signal indication
On/Off indication
Mounting Type
Locking Clamp Locking
Mounting type
DIN rail mounting
Width (Multiples of 9mm)
2

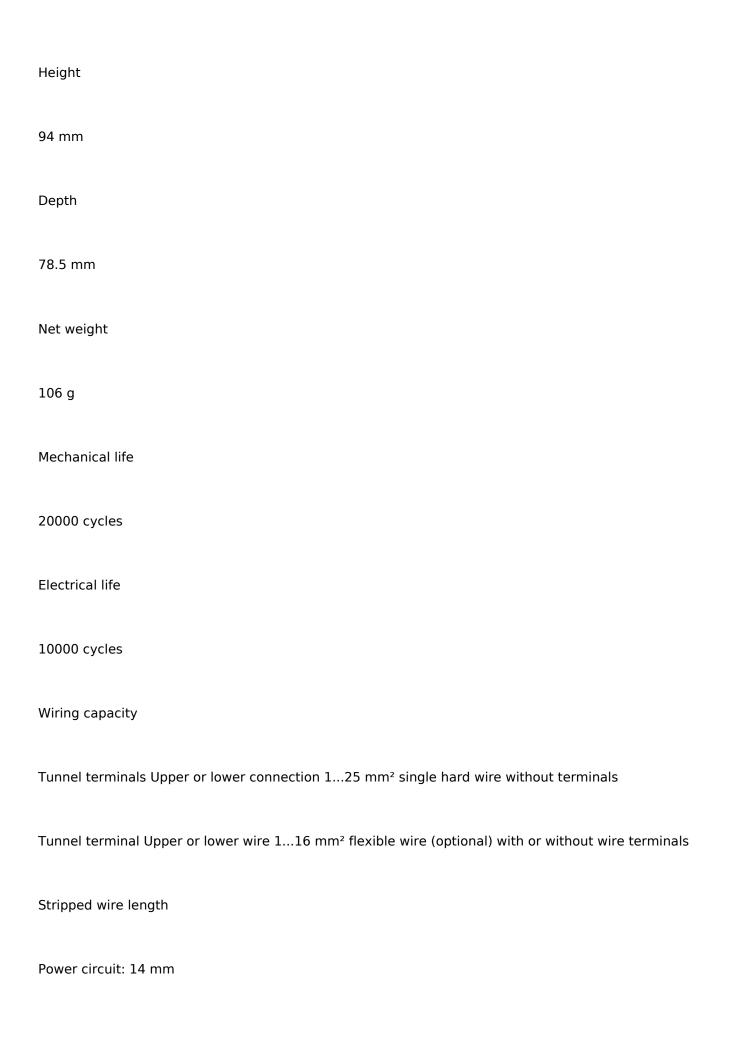

Tightening torque

Power supply circuit: 2.5 N.m.

Leakage current protection

(Required) Separate assembly

