




Check valve HGL-3/8-B 530032

URL:https://www.sxplc.com/check-valve-hgl-3-8-b-530032

Product data sheet

Valve function	
Pilot one-way function	
Air interface, air port 1	
G3/8	
Air interface, air port 2	
G3/8	
Pilot air port 21	
G1/4	
Driving method	

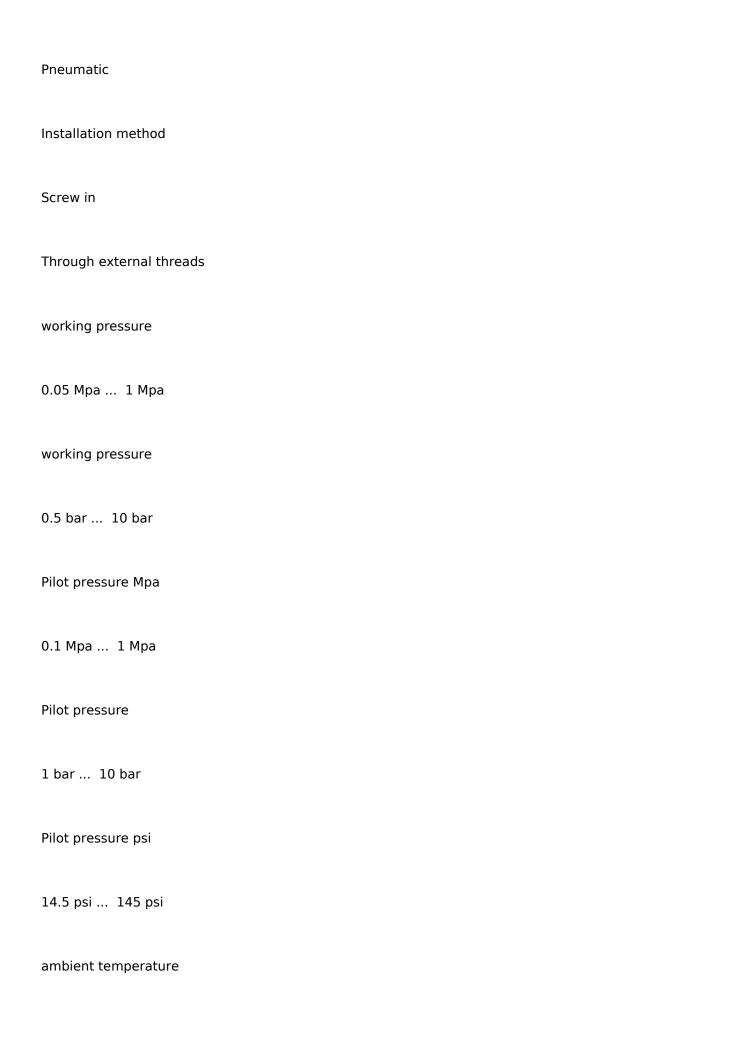

2/6



3/6

Corrosion resistance grade CRC
2- Moderate corrosion resistance
Paint Wetting Defect Substance (PWIS) Compliance
VDMA24364-B2-L
Cleanroom level
Level 4, in accordance with ISO 14644-1
Storage temperature
-10 °C 60 °C
Medium temperature
-10 °C 60 °C
Leading medium
Compressed air, in accordance with ISO 8573-1:2010 [7:4:4]
Nominal torque
12.5 Nm
Nominal tightening torque tolerance

Product weight	
62.9 g	
Material Description	
RoHS compliance	
Sealing material	
NBR	
Hollow bolt material	
Refined aluminum alloy	
Anodizing treatment	
Release ring material	
POM	
Check sleeve material	
NBR	
Swinging joint material	

± 10%

