
## **CONTACTOR AF26-30-00-13**

URL:https://www.sxplc.com/contactor-af26-30-00-13

## **Product data sheet**

Dimensions
Product Net Width:
95 mm
Product Net Depth / Length:
36 mm
Product Net Height:
86 mm
Product Net Weight:
0.31 kg
- echnical



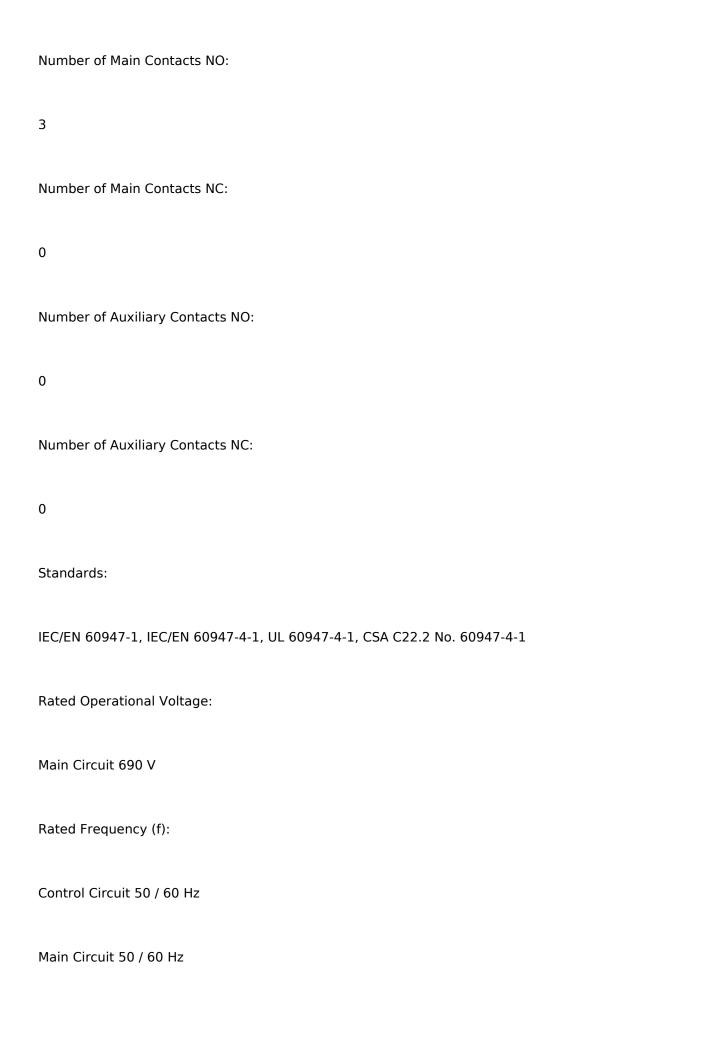





(440 V) 15 kW
(500 V) 15 kW
(690 V) 15 kW
(380 / 400 V) 11 kW
(220 / 230 / 240 V) 6.5 kW
Rated Short-time Withstand Current Low Voltage (Icw):
at 40 °C Ambient Temp, in Free Air, from a Cold State 10 s 350 A
at 40 °C Ambient Temp, in Free Air, from a Cold State 15 min 50 A
at 40 °C Ambient Temp, in Free Air, from a Cold State 1 min 150 A
at 40 °C Ambient Temp, in Free Air, from a Cold State 1 s 700 A
at 40 °C Ambient Temp, in Free Air, from a Cold State 30 s 225 A
Maximum Breaking Capacity:
cos phi=0.45 (cos phi=0.35 for le $> 100$ A) at 440 V 500 A
cos phi=0.45 (cos phi=0.35 for le $>$ 100 A) at 690 V 200 A
Maximum Electrical Switching Frequency:







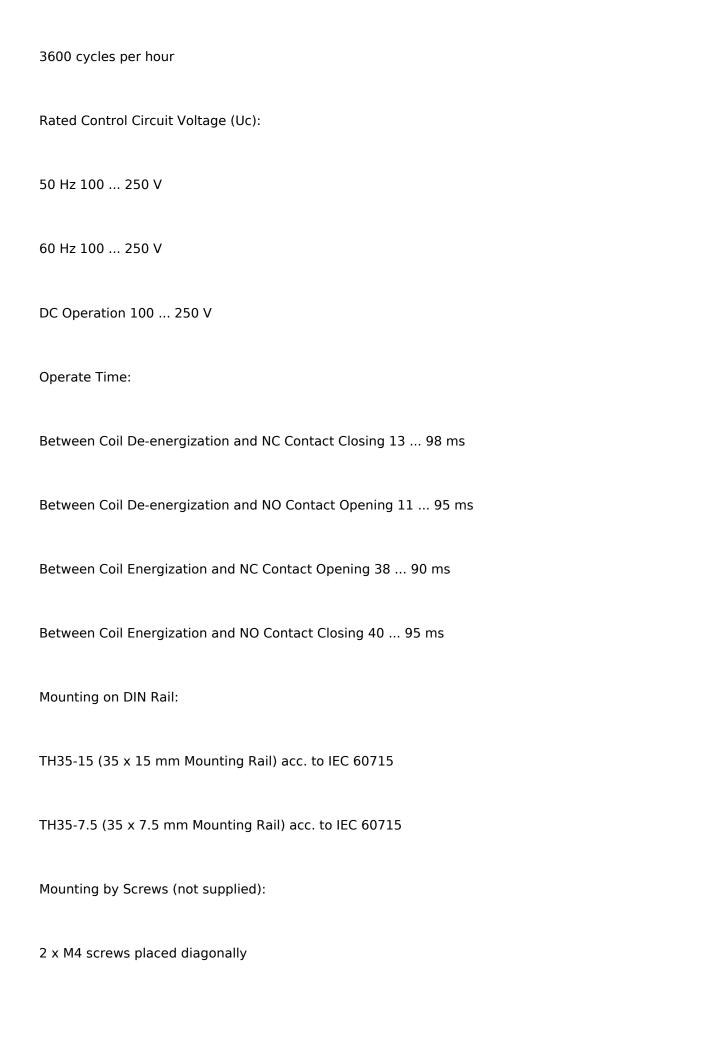

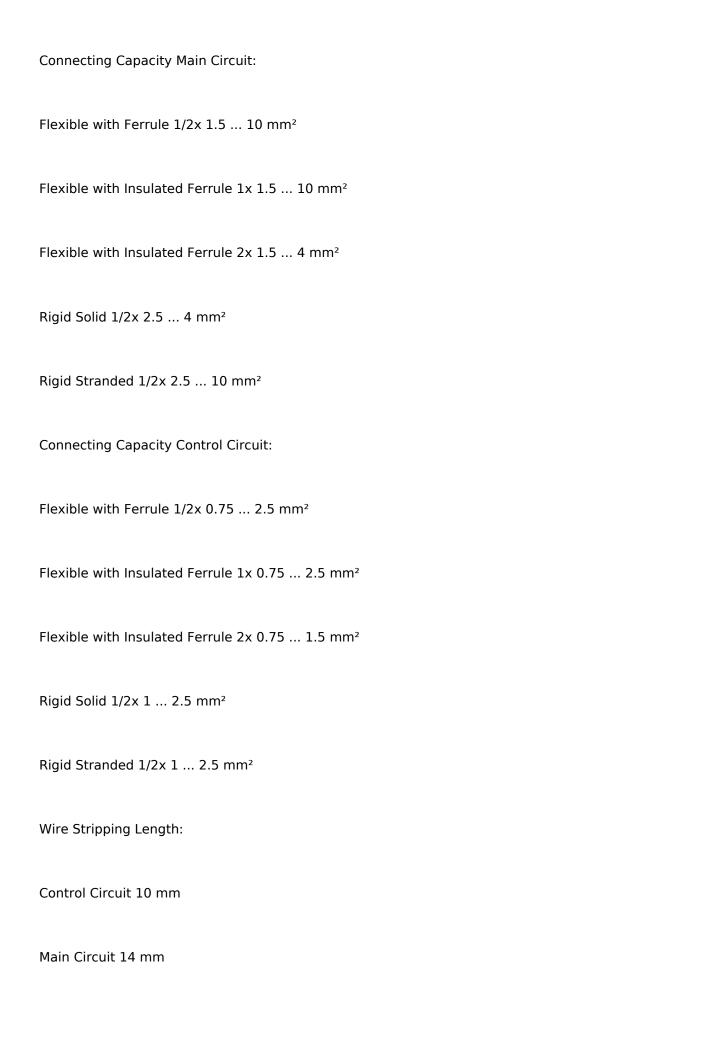

Degree of Protection:

acc. to IEC 60529, IEC 60947-1, EN 60529 Coil Terminals IP20

acc. to IEC 60529, IEC 60947-1, EN 60529 Main Terminals IP20

Terminal Type:

**Screw Terminals** 

